


**SOUTHERN NEVADA BUILDING OFFICIALS
REGIONAL STANDARDS**

B-106

11-02-05


Pg. 1 of 1

MOBILE HOME SKIRTING DETAIL

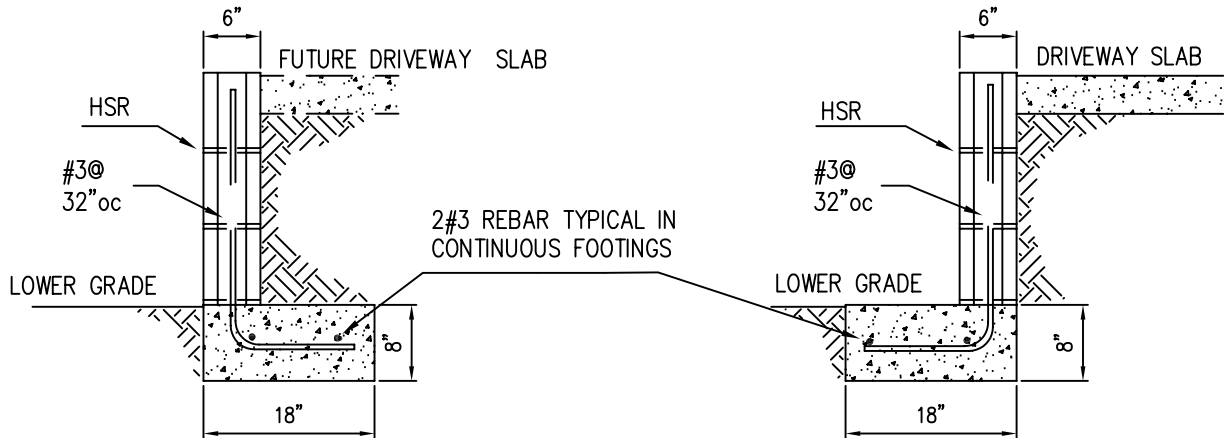

RETAINING WALL FOR DRIVEWAY SIDE IF SLAB
HAS NOT BEEN POURED

RETAINING WALL FOR DRIVEWAY SIDE IF
SLAB HAS BEEN POURED

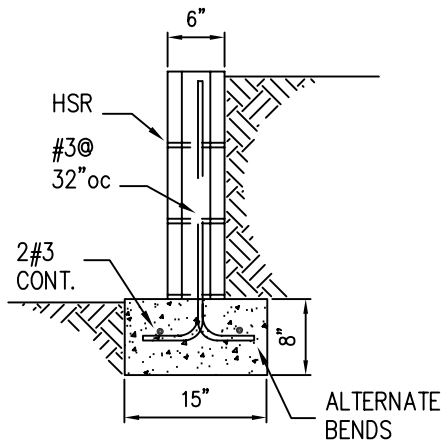

NO DRIVEWAY WALL CENTERED ON
FOOTING

- MAXIMUM HEIGHT 2'
- NOT TO BE ATTACHED TO OR SUPPORT MOBILE HOME
- HSR-HORIZONTAL STEEL REINFORCING TO BE 9 GAUGE LADDER WIRE IN MORTAR JOINT OR #3 REBAR IN BOND BEAM
- MINIMUM 3" CONCRETE COVER OVER REBAR
- ALL CELLS WITH REBAR TO BE GROUTED SOLID
- GROUT PROPORTIONS: 1 PART CEMENT, 3 PARTS 2 PARTS PEA GRAVEL SAND
- MORTAR PROPORTIONS; 1 PART CEMENT, 1/2 PART LIME, 4 1/2 PARTS SAND
- CONCRETE MINIMUM 4500 PSI
- CONCRETE BLOCK TO BE GRADE N
- ASSUMED SOIL BEARING PRESSURE IS 1000 PSF

INSPECTIONS REQUIRED
Footings Prior to
Placing Concrete
Wall Steel Prior to
Grouting
Final Inspection After
Completion

OWNER _____
PROJECT ADDRESS _____

Clark County
Dept. of Develop. Services
4701 W Russell Rd
Las Vegas NV 89118
(702) 455-3000

Boulder City
Building Department
401 California Avenue
Boulder City, NV 89005
(702) 293-9282

Henderson
Bldg & Fire Safety Dept.
240 Water St.
Henderson, NV 89015
(702) 267-3650

Las Vegas
Building & Safety Dept.
731 S. 4th Street
Las Vegas, NV 89101
(702) 229-6916

Mesquite
Building Department
10 East Mesquite Blvd.
Mesquite NV. 89027
(702) 346-2835

North Las Vegas
Building Department
2266 Civic Center Drive
N. Las Vegas, NV 89030
(702) 633-1577